


14th Kingdom of Bahrain Bowling Championship

Oil Pattern

2 Overhead View of Conditioner Pattern

Volume Per Board: 40 μ L		Forward Command		1st Buff Distance 37 feet	2nd Buff Distance 14 feet	Oil Travel Distance 42 feet			
Screen #	Left End of Stream	Right End of Stream	# Loads or Streams	Travel Speed (in/sec)	Beginning Distance of Load (feet)	Ending Distance of Load (feet)	# Boards Crossed per Load	Total Boards Crossed	Total Volume of Oil (μ L)
01F	2	2	3	14	0	5	37	111	4440
02F	3	3	3	14	5	10	35	105	4200
03F	4	4	3	14	10	15	33	99	3960
04F	5	5	3	14	15	20	31	93	3720
05F	5	6	3	14	20	25	29	87	3480
06F	7	7	2	18	25	30	27	54	2160
07F	8	8	2	18	30	35	25	50	2000
08F	9	9	0	18	35	37			
09F	9	19	0	22	37	42			
10F	2	2	0	10	42				
11F									
12F									
13F									
14F									
15F									
Total # Boards Crossed / mL on FWD								599	23.96
Lane Surface Type:		Comments:		Reverse Oil Distance 14 feet					
Condition: 1 = poor 2 = fair 3 = average 4 = good 5 = excellent				Reverse					
Screen #	Left End of Stream	Right End of Stream	# Loads or Streams	Travel Speed (in/sec)	Beginning Distance of Load (feet)	Ending Distance of Load (feet)	# Boards Crossed per Load	Total Boards Crossed	Total Volume of Oil (μ L)
01R	2	2	0	30	42	14			
02R	2	2	2	14	14	11	37	74	2960
03R	5	5	1	14	11	10	31	31	1240
04R	2	2	0	10	10	0			
05R									
06R									
07R									
08R									
09R									
10R									
11R									
12R									
13R									
14R									
15R									
Total # Boards Crossed / mL on REV								105	4.2
Total # Boards / mL FWD and REV								704	28.16

- Forward application buff out area
- Reverse application of conditioner
- Forward application of conditioner
- Combined forward and reverse applications
- Forward application with reverse buff out

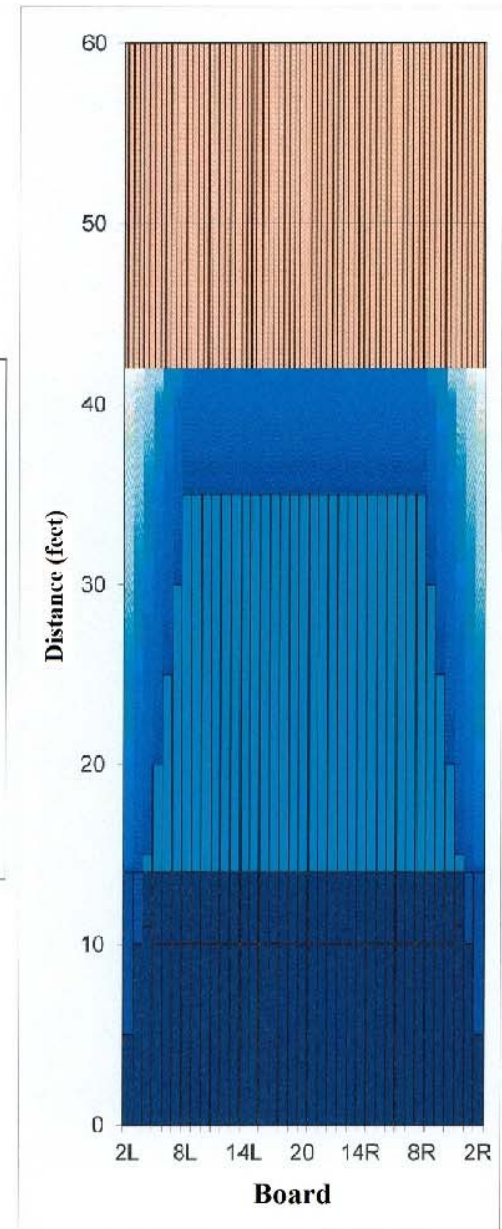

2 Composite Pattern

Microliters	Avg. 2-5L	Avg. 6-10L	Avg. 11-15L	Avg. 16-20L	Avg. 20-16R	Avg. 15-11R	Avg. 10-6R	Avg. 5-2R
Ratio	20:2L	20:5L	20:10L	20:15L	20:15R	20:10R	20:5R	20:2R
	4.40	1.47	1.00	1.00	1.00	1.00	1.47	4.40

